


Call-out numbers shown in the diagram below correspond to the first column of the specifications chart.

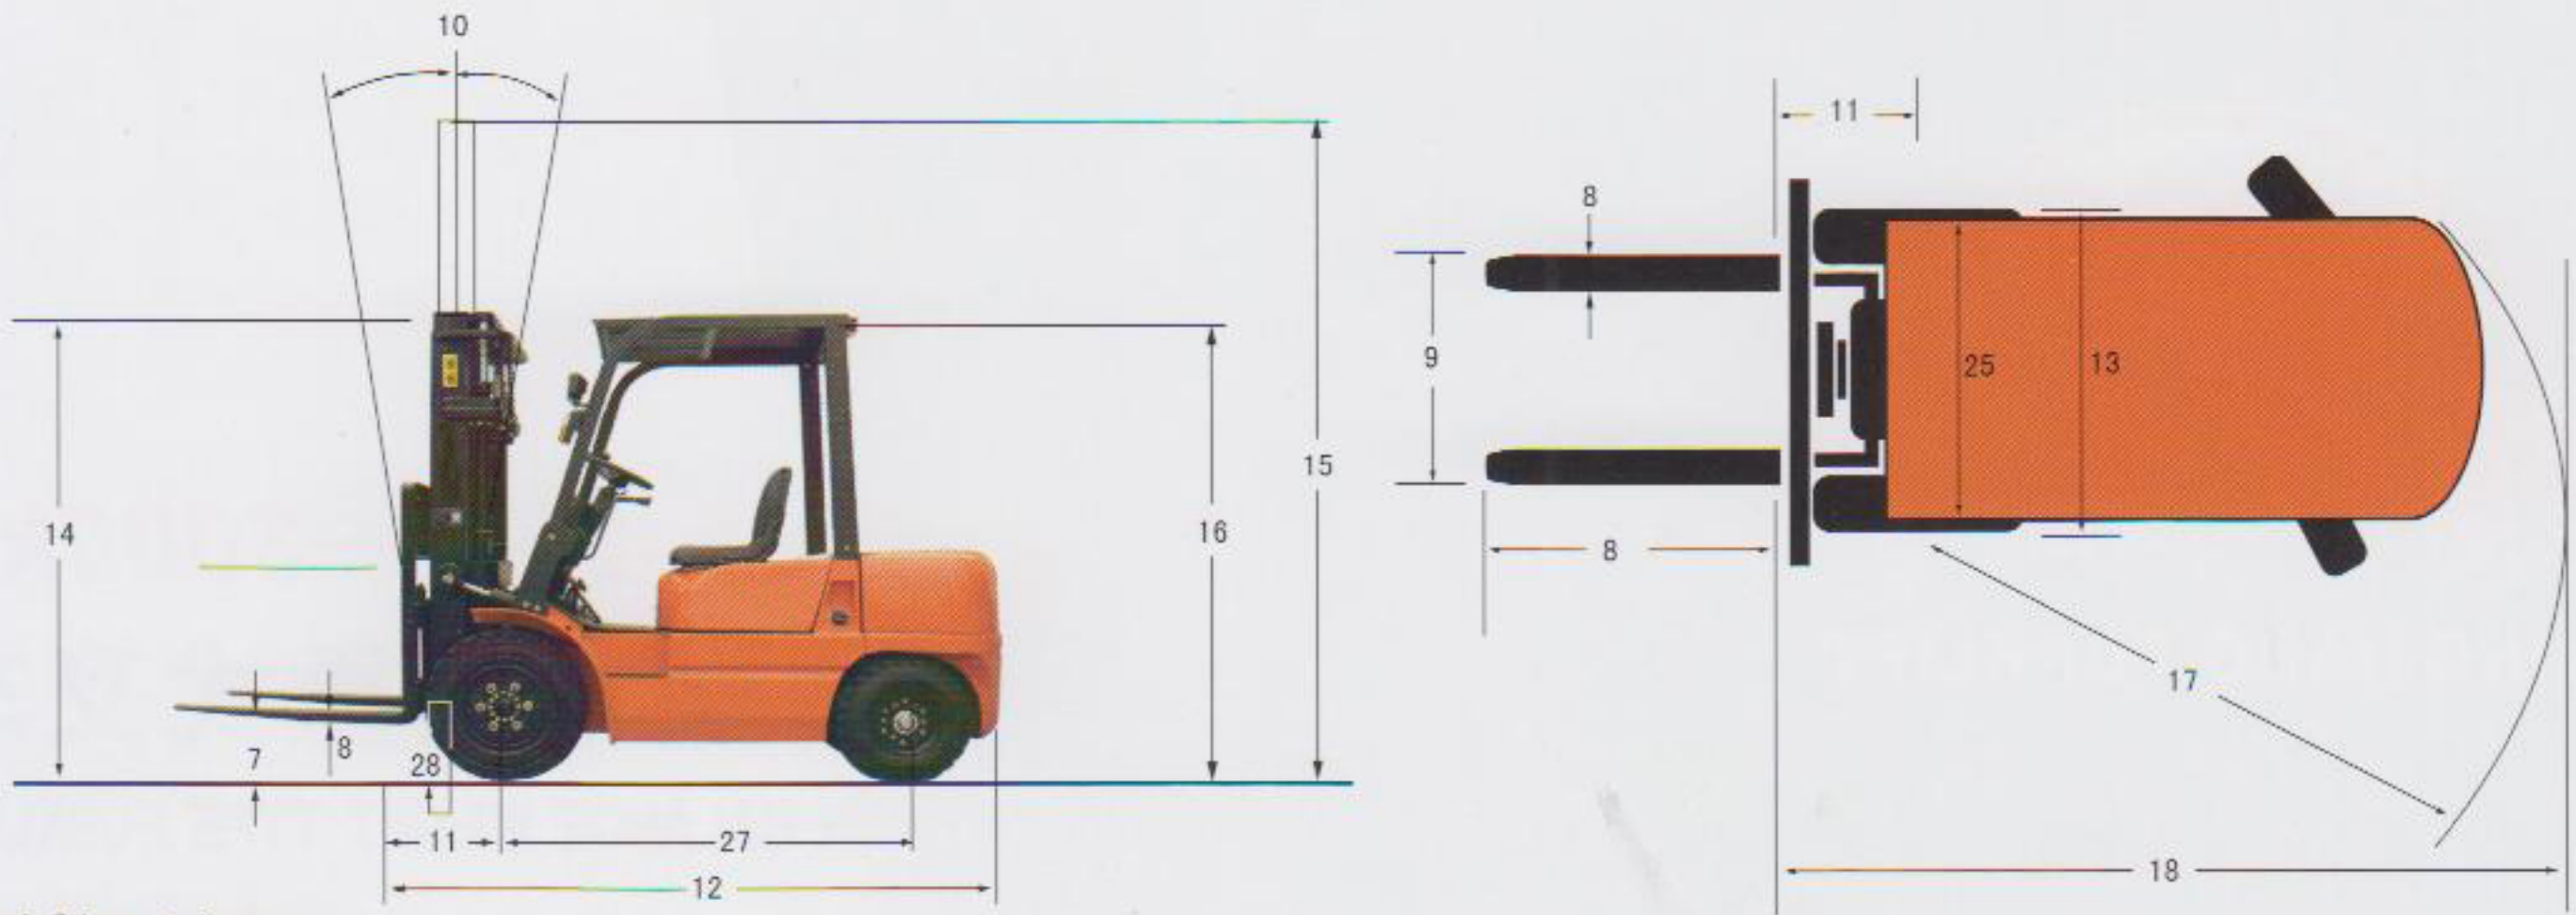

Specifications

General								
1	Manufacturer		CHANGLIN FORKLIFT					
2	Model		CLCD20	CLCD25	CLCD30	CLCD35		
3	Power type		Diesel	Diesel	Diesel	Diesel		
4	Rated capacity		kg	2000	2500	3000	3500	
5	Load center		mm	500	500	500	500	
Dimensions								
6	Lifting height		mm	3000	3000	3000	3000	
7	Free lifting height		mm	150	150	150	120	
8	Fork size		mm	1070*120*40	1070*120*40	1070*130*45	1070*130*45	
9	Fork spread(outside) Max./Min.		mm	1100/240	1100/240	1100/250	1200/290	
10	Mast tilt angle		deg	6/12	6/12	6/12	6/12	
11	Front overhang		mm	470	470	470	490	
12	Overall Dimensions	Overall length	mm	2530	2600	2730	3925	
13		Overall width	mm	1150	1150	1250	1250	
14		Mast closed height	mm	1995	1995	2005	2130	
15		Mast extended height	mm	4200	4200	4210	4250	
16		Overhead guard height	mm	2130	2130	2180	2130	
17	Min. turning radius		mm	2170	2240	2450	2650	
18	Min. right angle aisle width		mm	2680	2750	2950	3210	
Performance								
19	No/Full load	Travel speed	km/h	20	20	20	20	
20		Lift speed	mm/sec	450	450	400	400	
21	Max. gradeability		%	20	20	20	20	
22	Self weight		kg	3340	3690	4200	4280	
Chassis								
23	Tires	Front	mm	7.00-12-12PR	7.00-12-12PR	28*9-15-12PR	28*9-15-12PR	
24		Rear	mm	6.00-9-10PR	6.00-9-10PR	6.50-10-10PR	6.50-10-10PR	
25	Tread	Front	mm	960	960	1030	1030	
26		Rear	mm	980	980	980	980	
27	Wheelbase			1600	1600	1700	1850	
28	Min. mast ground clearance			120	120	140	140	
Drive unit&control								
29	Battery		V/AH	12/60	12/60	12/60	12/60	12/60
30	Engine	Model		495BPG	TD27	4TNE92	490BPG	4TNE98
31		Manufacturer		CHINA	NISSAN	YANMAR	CHINA	YANMAR
32		Rated power	kw/rpm	39/2500	44/2500	33/2450	37/2650	44.3/2300
33		Rated torque	N.m/rpm	168/1800	172/1600	136/1600	148/1600	186/1700
34		No. of cylinders		4	4	4	4	4
35		Bore*stroke	mm	95*105	96*92	92*100	90*100	98*110
36		Displacement	cc	2980	2663	2659	2540	3319
37	Fuel tank capacity		L	60	60	60	60	60

Specifications, equipment, technical data, photos and illustrations are based on information at time of printing and subject to change without notice. Some products may be shown with optional equipment